



易冷雪柜及冷房工业有限公司

(1043774-V)


EASYCOOL REFRIGERATION AND COLD ROOM SDN. BHD.

(Specialise in sales & services of cold room & etc.)

No.22, Lorong Seruling 3, Kawasan Perindustrian Valdor, 14200 Sungai Bakap, S. P. S. Penang.

Tel : 04 - 582 8623 Fax : 04 - 582 9623

Email : tamity88@gmail.com

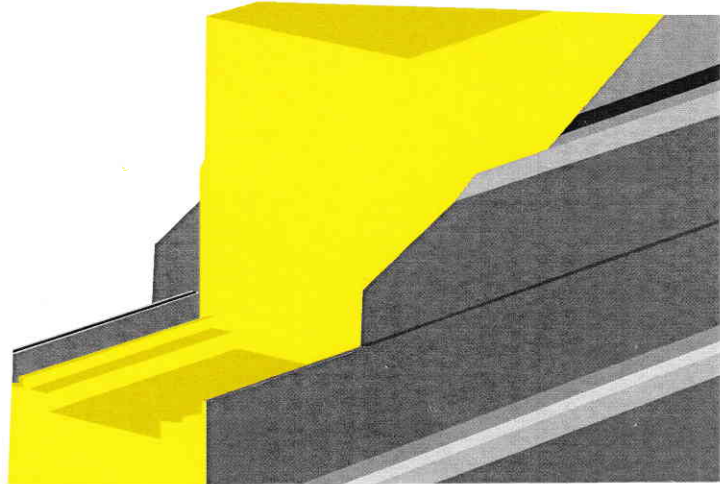

Polyurethane panel comlock joint

Specifications (P.U)

Dimension	1194 mm width x any desired length
Thickness	50 mm / 75 mm / 100 mm / 125 mm / 150 mm
Injected Density (kg/m³)	45 ($\pm$ 5kg/m ³)
Weight	Varies in accordance to thickness
Skins	Standard Steel 0.45 mm / 0.5mm 350g/m² nominal zinc coating Paint of polyester, silicone modified polyester Colour: white (Other colors and finishes available*) Steel* Available in a range of colours and finishes Aluminium and stainless steel* *Subject to quantities available
Joints	Cam-lock system (tongue & groove), Semi cam-lock system (tongue & groove) Clip lock system
Sealants	Non-setting butyl / polysulphide / silicone


Note: Top Amity Panels have been approved and certified by SIRIM and Bomba Malaysia.

TOP AMITY PANEL


TOP AMITY PANEL




Polyurethane ceiling to ceiling panel joint detail

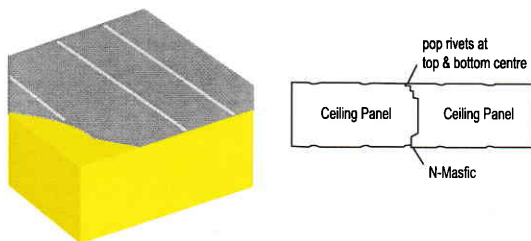


Polyurethane wall to ceiling panel corner joint detail

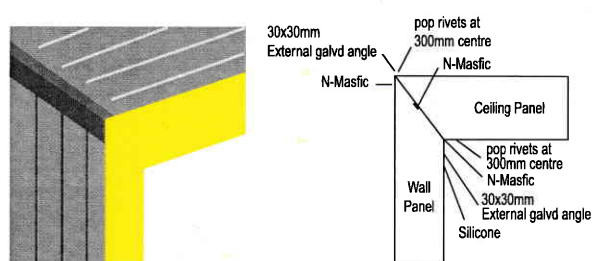


Polyurethane wall to wall panel joint detail

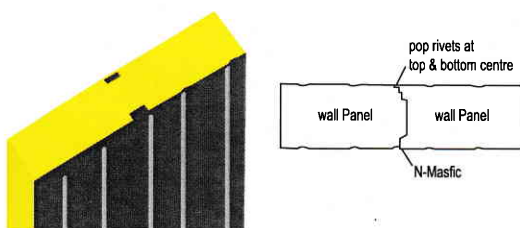


Polyurethane wall to wall panel corner joint detail

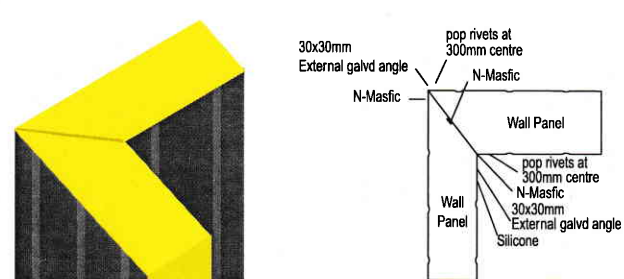


Polyurethane wall to ceiling panel corner joint detail

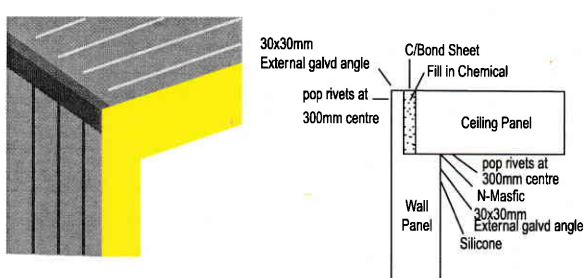

Polyurethane ceiling panel big suspension joint

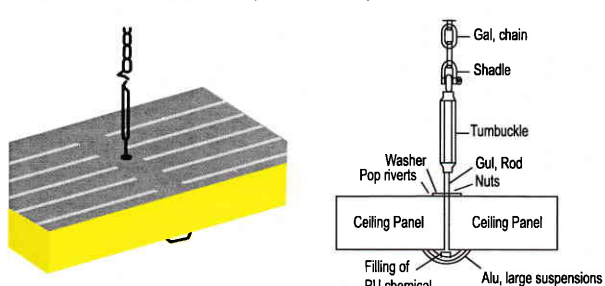

Polyurethane ceiling panel nylon hanger joint

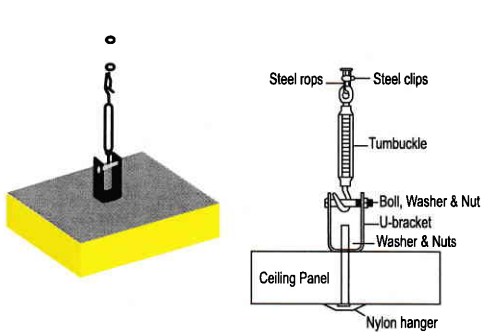

Polyurethane finishing floor sectional

